SEAC**-IN-**1 18-HE45D1-1

Installer's Guide

Seacoast Kit

A WARNING: HAZARDOUS VOLTAGE - DISCONNECT POWER BEFORE SERVICING

ALL phases of this installation must comply with NATIONAL, STATE AND LOCAL CODES

IMPORTANT — This Document is **customer property** and is to remain with this unit. Please return to service information pack upon completion of work.

MASTER KIT CONTENT:


5 - Plastic film (8 inch wide) with magnetic strip on top.1 - Installer's Guide.

INSPECTION:

Check carefully for any shipping damage. This must be reported to and claims made against the transportation company immediately. Any missing parts should be reported to your supplier at once and replaced with authorized parts only.

INSTALLATION:

- 1. Disconnect power to the unit. Open the coil service door.
- 2. Attach the film to the inside lip of the top cover, using the magnetic strip. Check that you have a strong magnetic attraction between the strip and the top.
- 3. Center the film over the aluminumcopper transition joints. (See figure 1.)
- Cut any excess length of film to within 1/2 inch of the base.
- 5. Close coil service door and reconnect power to the unit.

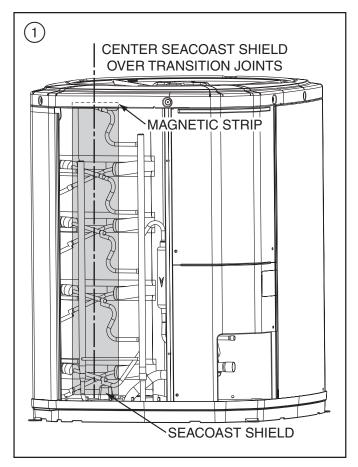

Literature Order Number	SEAC-IN-1	
File Number	UN-SV-ACC-SEAC-IN-1 2/02	
Supersedes	New	
Stocking Location	PI Louisville & Inland-LaCrosse	P.I.

The Trane Company An American Standard Company

For more information contact your local dealer (distributor)

Since the manufacturer has a policy of continuous product and product data improvement, it reserves the right to change design and specifications without notice.