



Broadest range. Genuine Armaflex®.

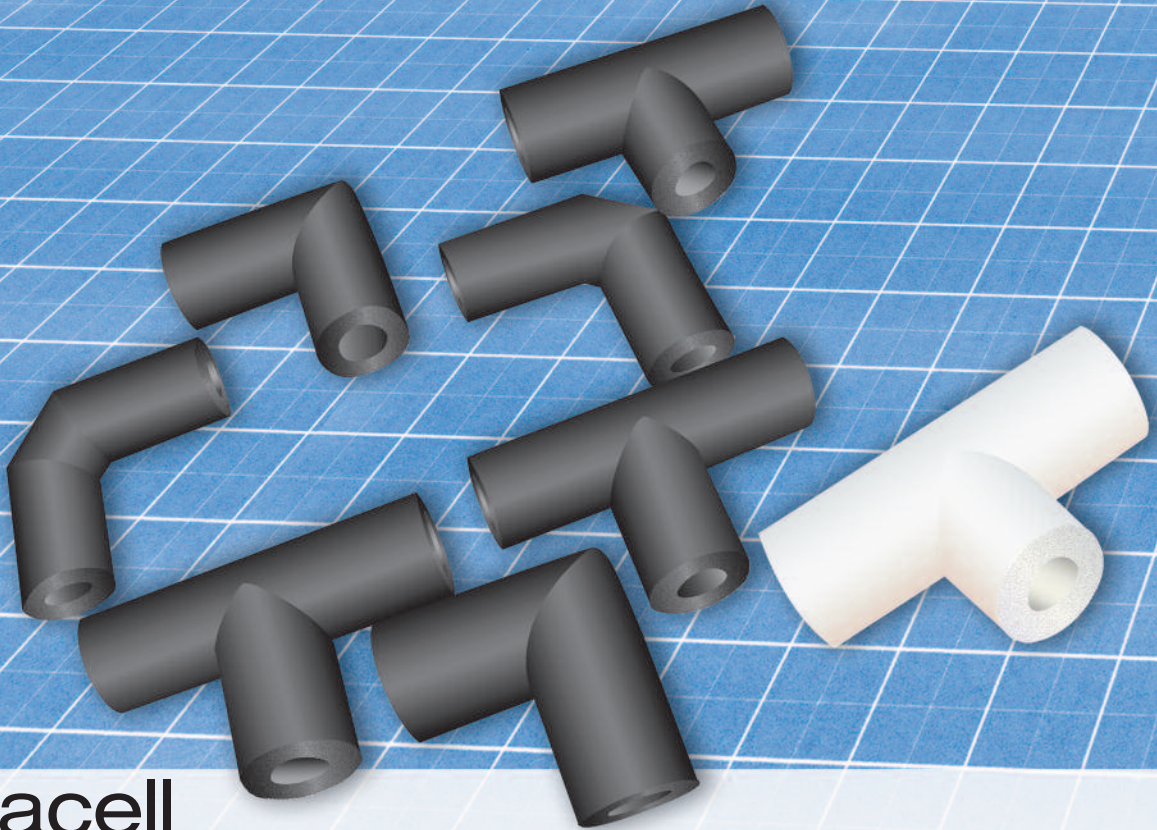

Armacell Fabricated Fittings

AP Armaflex • NH Armaflex • AP Armaflex White

Made-to-order prefabricated fittings, using the world's leading brand of black, nonhalogen and white closed cell insulation.

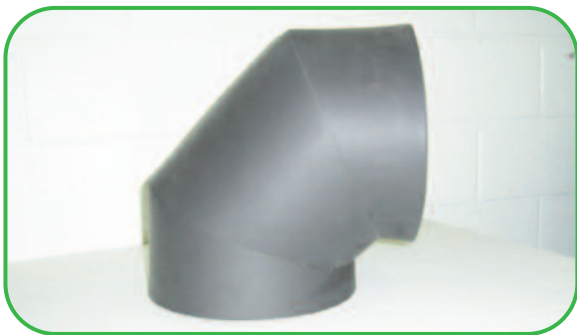

- Wall thicknesses up to 2"
- Labor saving
- Easy to work with and apply
- Provides total Armaflex system integrity:
Thermal and Moisture Resistance

- 90° elbows: 2-piece and 3-piece
- T's
- 45° elbows
- Grooved fittings (AP Armaflex black)
- Grooved Couplings

See reverse side for more details

Fabricated
Fittings


Armacell Fabricated Fittings

Armacell Fabricated Fittings are the premier prefabricated fittings for Armaflex pipe insulation systems. Together with the Armaflex tubes, they provide complete system integrity for retarding heat gain and controlling condensation drip from chilled-water and refrigeration systems.

Refer to Price List for items numbers, sizes and dimensions, and availability.

AP Armaflex black fabricated fittings provide thermal protection (0.25 k) and condensation resistance (0.05 Water Vapor Transmission factor), with all other AP Armaflex performance advantages.

- 1/2", 3/4", 1", 1-1/2" and 2" wall thicknesses for 2-piece and 3-piece 90° elbows, T's and 45° elbows
- 1", 1-1/2" and 2" thicknesses for grooved fittings, with couplings

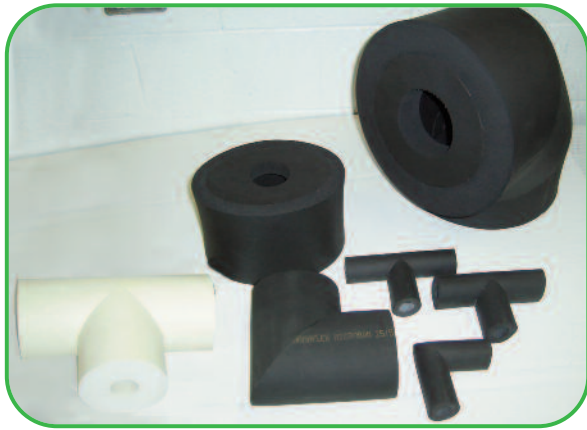


NH Armaflex nonhalogen fabricated fittings provide thermal protection (0.27 k) and condensation resistance (0.05 WVT), with all other NH Armaflex performance advantages. NH Armaflex is the world's first nonhalogen insulation, developed for environments that require specific protection against smoke containing acid gases.

- 3/4" and 1" wall thicknesses for 2-piece and 3-piece 90° elbows, T's and 45° elbows

AP Armaflex W white fabricated fittings provide thermal protection (0.25 k) and condensation resistance (0.05 Water Vapor Transmission factor), with all other AP Armaflex W performance advantages. Minimizes need for priming or painting in interior applications.

- 1/2", 3/4", 1", 1-1/2" and 2" wall thicknesses for 2-piece and 3-piece 90° elbows, T's and 45° elbows

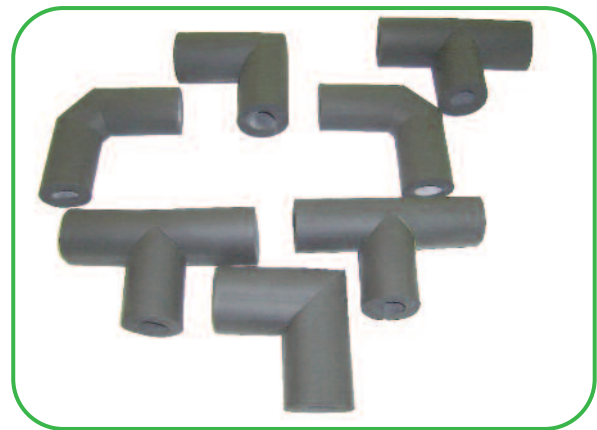

Fabricated Fittings: Wall Thickness

Armacell Product	2-piece 90° elbows	3-piece 90° elbows	T's	45° elbows	Grooved Fittings
AP Armaflex Black	1/2", 3/4", 1", 1-1/2" and 2"	1/2", 3/4", 1", 1-1/2" and 2"	1/2", 3/4", 1", 1-1/2" and 2"	1/2", 3/4", 1", 1-1/2" and 2"	1", 1-1/2" and 2"
NH Armaflex	3/4" and 1"	3/4" and 1"	3/4" and 1"	3/4" and 1"	--
AP Armaflex White	1/2", 3/4", 1", 1-1/2" and 2"	1/2", 3/4", 1", 1-1/2" and 2"	1/2", 3/4", 1", 1-1/2" and 2"	1/2", 3/4", 1", 1-1/2" and 2"	--

ARMACELL LLC

TEL: 1-800-866-5638

FAX: 919 304-3847

info.us@armacell.com

www.armacell.com

7600 Oakwood Street Extension • Mebane, NC 27302



Armacell provides this information as a technical service. To the extent the information is derived from sources other than Armacell, Armacell is substantially, if not wholly, relying upon the other source(s) to provide accurate information. Information provided as a result of Armacell's own technical analysis and testing is accurate to the extent of our knowledge and ability, as of date of printing, using effective standardized methods and procedures. Each user of these products, or information, should perform their own tests to determine the safety, fitness and suitability of the products, or combination of products, for any foreseeable purposes, applications and uses by the user and by any third party to which the user may convey the products. Since Armacell cannot control the end use of this product, Armacell does not guarantee that the user will obtain the same results as published in this document. The data and information are provided as a technical service and are subject to change without notice.