



# Glass Door Merchandisers

Single Glass Door Coolers

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

Glass Door Merchandisers: Single Glass Door Coolers

## Models

- DMER12-G - 12ft<sup>3</sup> capacity single glass door cooler
- DMER17-G - 17ft<sup>3</sup> capacity single glass door cooler



DMER12-G

## Standard Features

- Blue top header sign standard
- Forced air evaporator for quick temperature pull down
- Heavy duty hinges with automatic return
- Attractive PVC frame
- Unit sits upon adjustable levelers
- Double paned Low-e glass door
- Built in door handle
- Three heavy duty shelves
- Robust body with thick walls, injected with CFC-free polyurethane
- Listed to NSF-7 for the storage and/or display of packaged or bottled product
- Exterior cabinet made of galvanized, pre-painted steel, with baked polyester paint
- Heavy duty condensing unit for R134a, located in front for easy-access maintenance
- Forced-air condenser made of copper and aluminum, resistant to rust and saline environments
- Reinforced 16-gauge steel base
- One year parts and labor warranty and an additional four year compressor warranty (U.S.A./Canada only)

## Options & Accessories

- Wire shelf kit

## Specifications

**The exterior** is constructed of galvanized, pre-painted steel, with a baked polyester paint. The base is reinforced 16-gauge steel.





**The interior** is an attractive, NSF approved, white interior cabinet. It's robust body is constructed of thick walls. DMER12-G walls measure 1.69" (4cm), DMER17-G walls measure 2.25" (6cm). The entire cabinet structure is insulated with high-density foamed in place CFC-free polyurethane. Innovative LED interior lighting design is protected by safety shielding. Three adjustable heavy duty coated wire shelves are provided.

**Refrigeration System:** Forced air condenser is made of copper and aluminum, resistant to rust and saline solutions. The self-contained refrigeration system uses environmentally friendly (CFC-free) 134A refrigerant. It is located in the front of the unit for easy access. The refrigerant flow is controlled using a capillary tube. Forced air evaporator ensures quick temperature pull-down.

**Door:** Extruded frame door is constructed with Low-E, double pane thermal glass. They are the latest in energy efficient technology. Each door has heavy duty hinges with automatic

return. Handle shall be built in.



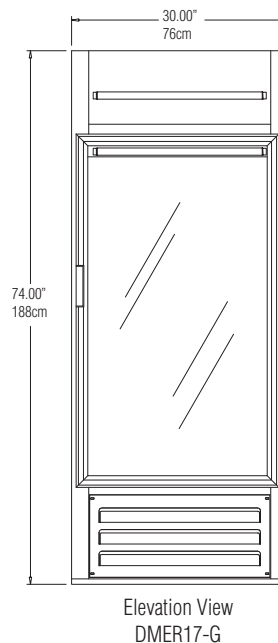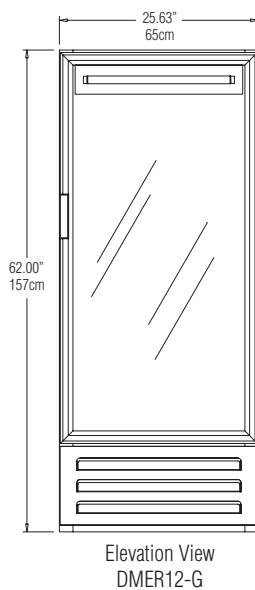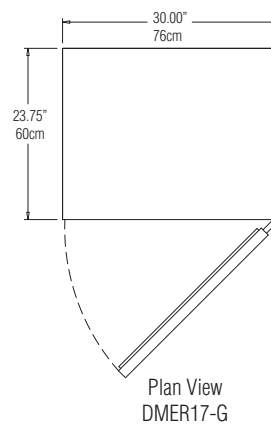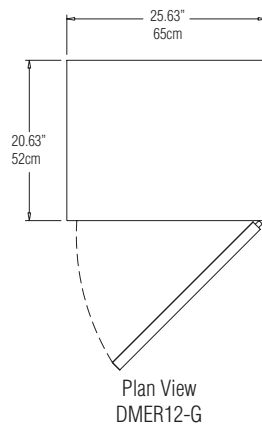

| Specifications |                    |      |      |               |           |                 |
|----------------|--------------------|------|------|---------------|-----------|-----------------|
| Model          | Capacity           | H.P. | Amps | Voltage       | NEMA Plug | Shipping Weight |
| DMER12-G       | 12 ft <sup>3</sup> | 1/4  | 3.8  | 115V/60Hz/1Ph | 5-15P     | 215lbs/98kg     |
| DMER17-G       | 17 ft <sup>3</sup> | 1/4  | 3.6  | 115V/60Hz/1Ph | 5-15P     | 267lbs/121kg    |

Delfield reserves the right to make changes to the design or specifications without prior notice.