

# Scientific Line

Self-Contained Glass Door Reach-In Refrigerator

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

## Models

<u>One Section</u>	<u>Two Section</u>	<u>Three Section</u>	
LSR1-G	LSR2-G	LSR3-G	Stainless exterior and interior with full glass door
LAR1-G	LAR2-G	LAR3-G	Stainless exterior and aluminum interior with full glass door
LMR1-G	LMR2-G	LMR3-G	Stainless front, aluminum sides and interior with full glass door



LSR2-G

## Standard Features

- Ducted airflow left to right air movement
- Microprocessor control with RS485 port
- Glycol filled product simulator bottle
- Built in door locks with heavy duty strikes
- Full length quick grip metal door handle
- Pressure relief valve is standard to prevent door vapor lock
- Expansion valve refrigeration system provides quick recovery after door openings
- L.E.D. digital temperature readout on easy-view front panel
- Four (4) epoxy-coated wire shelves per section
- Temperature range of 2°C to 4°C
- Illuminated interior for clear visibility
- Stainless steel breaker strips
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Energy savings door heater switch
- Heavy-duty 3" (4" ride height) casters;

front casters with brakes and swivel, shipped loose

- Made in the USA
- Adaptive defrost
- +/- 2°C tight tolerance
- 7/8" access port

## Options & Accessories

- Additional epoxy-coated wire shelf
- Stainless steel interior drawer(s)
- Temperature recorder
- Alarm/monitor system
- Recorder charts and pens
- Chart # 1120-061 (-17°C to 38°C)
- Chart # 1120-062 (0°C to -60°C)
- Ink pen set # 1120-025

## Specifications

**Exterior:** LS and LA models shall have corrosion resistant stainless steel exterior cabinet sides, front and shroud. LM models shall have corrosion resistant aluminum on exterior cabinet sides and will have stainless front and shroud.

**Interior:** Cabinet interior shall be corrosion resistant stainless steel (LS models) or heavy gauge aluminum (LA and LM models). Bottom and top surfaces shall be die stamped to provide radius corners and recessed floor. Four epoxy coated wire shelves are provided per section. Shelves rest on clips which are adjustable on 1" increments on stainless steel pilasters affixed to the cabinet interior. Pilasters are removable without tools for cleaning. A fluorescent light is mounted to the interior ceiling of each compartment, the switch is part of the light assembly. Door openings are protected with heavy gauge stainless steel breaker strips. An air duct shall be mounted to the ceiling assuring low velocity, even air movement throughout the cabinet interior.

**Doors:** Triple paned tempered thermopane glass. Each door has two edgemount, self-closing, cam lift style hinges. Door handle is continuous along vertical dimension of the door. Door gaskets are magnetic and mount to the door, snapping in place and removable with out tools. Keyed door lock is mounted to the door. Lock engages into a heavy duty strike mounted to the cabinet face.


**Refrigeration system:** All components are mounted to the exterior of the cabinet ceiling. Environmentally friendly R404A refrigerant is used. The system has the capability of maintaining between 2°C and 4°C. Refrigerant is metered using a highly responsive thermostatic expansion valve. System is controlled using Delfield's microprocessor electronic temperature control, which provides improved pull down times, reduces compressor cycling and longer compressor life with lower energy consumption. Control system uses **adaptive defrost** to assure evaporator coil is free of ice and is operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

**Electrical:** Standard electrical connections shall be 115V, 60 Hz single phase. A 10' cord and plug is supplied and attached to a junction box mounted on the exterior top of the cabinet.

**NOTE:** This equipment is designed for use in locations with heat and air conditioning, where temperature and relative humidity at 21°C and 50% relative humidity.

**Warranty** included is a 2 year parts and labor warranty with an additional 3 years parts warranty on the compressor (5 total years parts on the compressor).



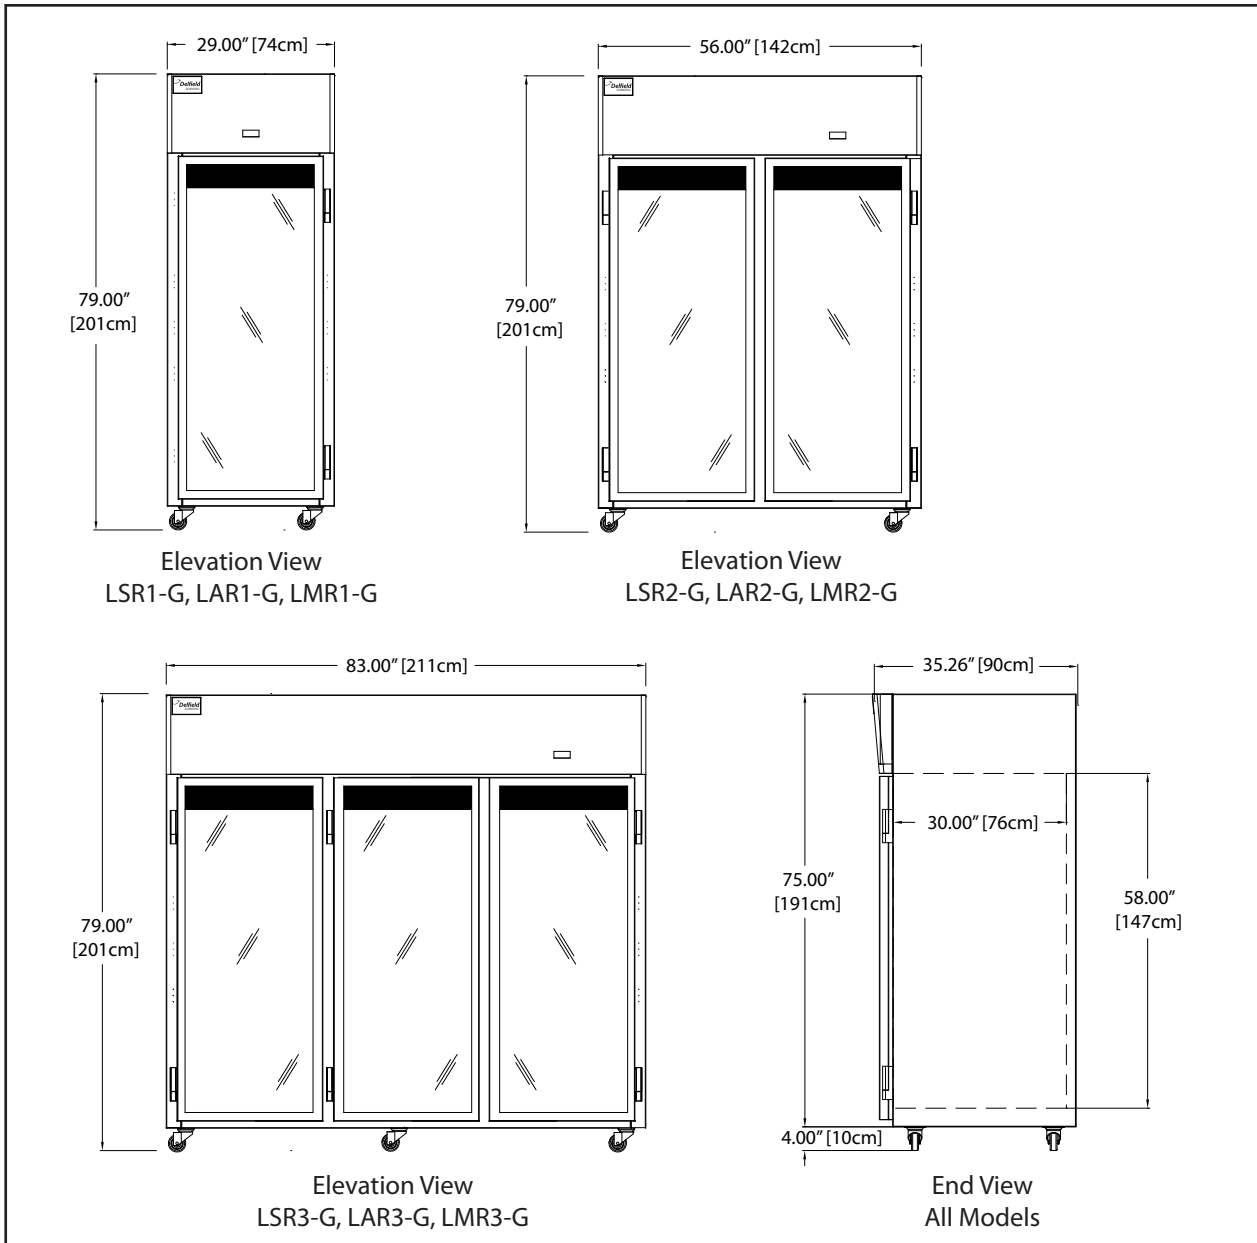

Specifications

Models	# of Shelves	Shelf Ft <sup>2</sup>	Interior Ft <sup>3</sup>	H.P.	BTU/Hr	V/Hz/Ph	Amps	Min. Circuit Amp	NEMA Plug	Ship Weight
LSR1-G LAR1-G LMR1-G	4	17.08	24.96	1/4	2092	115/60/1	6.0	15	5-15P	418lbs 190kg
LSR2-G LAR2-G LMR2-G	8	34.16	51.92	1/3	3226	115/60/1	9.5	15	5-15P	650lbs 295kg
LSR3-G LAR3-G LMR3-G	12	51.24	78.89	1/2	5465	115/60/1	14.5	20	5-20P	830lbs 376kg

Delfield reserves the right to make changes to the design or specifications without prior notice.