

# BACK MOUNT MEGA-TOP SANDWICH PREP. TABLE

Back Mounted Condensing Unit



**EPB – Series Model : EPBWR2**

WARRANTY

5 YEAR Compressor

3 YEAR Parts & Labor



**Operating temperature range is 32°F ~ 42°F**

### Contact

201 W. Artesia Blvd, Compton, CA 90220  
 T. (310) 323-6586, (800) 444-6285 F. (310) 323-7524, (310) 761-1127



Please visit our website for updated Energy Efficiency information

### Cabinet Construction

Heavy duty stainless steel interior and exterior, galvanized steel finished bottom and back wall of exterior. High quality 16 gauge stainless steel worktop, top lid and hood. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

### Refrigeration System

- Back mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Slide-out condensing unit for convenient repair and maintenance
- Front air breathing for built-in applications
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pressure relief port for rapid cabinet re-entry
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

### Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Rounded corners for a sleek and modern appearance
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles for a flat surface

### Preparation Area

- Mega-top, three rows of 1/6 sized pans
  - 1/2" thick foam insulated lids to prevent moisture build-up and heat exchange
  - Removable and adjustable sanitary 9 1/8" deep cutting board
  - Sanitary polycarbonate pans
- (Note: refer to the website for pan configurations)*

### Shelving

- One epoxy coated wire shelf per section
- Stainless steel pilasters and shelf clips

### Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat

### Option

- 2 1/2" diameter casters (3 1/2" overall height)

Model	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight	Exterior Dimensions		
										L	D†	H*
EPBWR2	2	15	1/3	R-134A	2	1/6 x 24	115-60-1	3.98	381lbs (172.8kg)	59 1/8" (1506 mm)	35 1/4" (800 mm)	37 1/2" (740 mm)

Product dimensions are for general purposes and not absolute value. Product capacity is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

\*: Height does not include 5" for casters  
 †: Depth includes 9 1/8" cutting board

# BACK MOUNT MEGA-TOP SANDWICH PREP. TABLE

Back Mounted Condensing Unit



**EVEREST**  
REFRIGERATION  
www.EVERESTref.com

**EPB – Series Model : EPBWR2**

DIMENSIONAL DATA		
Net capacity cu. ft.	15 (424.8 cu l)	
<b>Exterior (mm)</b>	Length Overall in.	59 1/8" (1506)
	Depth Overall in.†	35 1/4" (890)
	Height Overall in.*	37 1/2" (952)
<b>Interior (mm)</b>	Length Overall in.	55 1/8" (1400)
	Depth Overall in. <sup>Da</sup>	26 3/4" (680)
	Depth Overall in. <sup>Db</sup>	17 1/8" (435)
	Height Overall in. <sup>Ha</sup>	22" (560)
	Height Overall in. <sup>Hb</sup>	15 3/8" (390)
Crated Weight	381lbs (172.8kg)	
# of Doors	2	
# of Shelves	2	
# of Pans	1/6 x 24 (6" Deep)	
Shelf Size Length x Depth in. (mm)	27" x 14 3/4" (685 x 375)	
ELECTRICAL DATA		
Voltage (V-Hz-Ph)	115-60-1	
Full load amperes	3.98	
Feed wires with Ground	3	
Cord Length ft.	9	
REFRIGERATION DATA		
Refrigerant	R-134A	
Compressor H.P.	1/3 HP	
BTU/HR <sup>a</sup> (Kcal/h)	2555 (644)	


Specifications subject to change without notice.

- \*: Height does not include 5" for casters.
- †: Depth includes 9 1/8" cutting board
- Da: Interior Depth (top level).
- Db: Interior Depth (bottom level).
- Ha: Interior Height (floor to ceiling).
- Hb: Interior Height (floor to evaporator cover).
- a: Based on evaporating temperature of 23°F(-5°C) & Condensing temperature of 131°F(55°C).


Equipped With One NEMA 5-15P Plug




## Dimensions (mm)

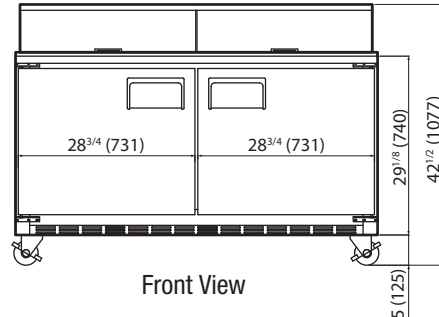

Front View

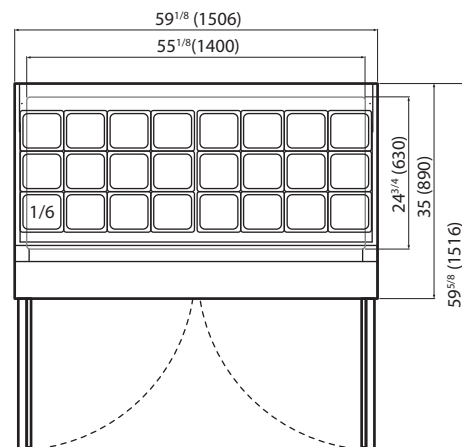

Top View

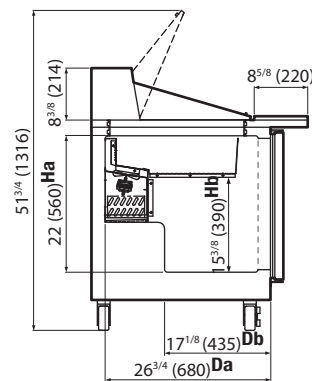

Side View

- Project / Customer \_\_\_\_\_
- Item No. \_\_\_\_\_
- Quantity \_\_\_\_\_



## Warranty

- 5 Year — Compressor Warranty
- 3 Year — Parts & Labor Warranty

## Contact

201 W. Artesia Blvd, Compton, CA 90220  
T. (310) 323-6586, (800) 444-6285  
F. (310) 323-7524, (310) 761-1127