

# DRAWERED UNDERCOUNTER REFRIGERATOR

Back Mounted Condensing Unit



**ETB – Series    Model : ETBWR2-D4**

**WARRANTY**

**5 YEAR** Compressor  
**3 YEAR** Parts & Labor



**Operating temperature range is 32°F ~ 42°F**

## Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished bottom and back wall of exterior. High quality 16 gauge stainless steel worktop, ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

## Refrigeration System

- Back mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Slide-out condensing unit for convenient repair and maintenance
- Front air breathing for built-in applications
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pressure relief port for rapid cabinet re-entry
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

## Drawers

- Heavy duty stainless steel interior and exterior
- 2.5" thick foamed-in-place polyurethane insulation
- One piece snap-in magnetic drawer gaskets for easy replacement
- Heavy duty recessed drawer handles for a flat surface
- Heavy duty 304 stainless steel drawer frames with low-friction ball bearing slides  
*( Note: refer to the website for pan configurations )*

## Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat

## Options

- 4" high stainless steel backsplash for worktop use
- 2 1/2" diameter casters (3 1/2" overall height)

## Contact

201 W. Artesia Blvd, Compton, CA 90220  
T. (310) 323-6586, (800) 444-6285 F. (310) 323-7524, (310) 761-1127



Please visit our website for updated Energy Efficiency information

| Model     | # of Drawers | # of Pans <sup>a</sup>               | Capacity (Cu. Ft.) | HP   | Refrigerant | # of Shelves | Power (V-Hz-Ph) | Amps | Crated Weight    | Exterior Dimensions  |                     |                     |
|-----------|--------------|--------------------------------------|--------------------|------|-------------|--------------|-----------------|------|------------------|----------------------|---------------------|---------------------|
|           |              |                                      |                    |      |             |              |                 |      |                  | L                    | D                   | H*                  |
| ETBWR2-D4 | 4            | 1/2 x 4, 1/3 x 8<br>1/4 x 2, 1/6 x 4 | 15                 | 1/4+ | R-134A      | N/A          | 115-60-1        | 4.80 | 347lbs (157.4kg) | 59 1/4"<br>(1506 mm) | 31 1/2"<br>(800 mm) | 29 1/8"<br>(740 mm) |

Product dimensions are for general purposes and not absolute value. Product capacity is calculated based on standard industry figures. **a** : Drawer pans are not included **l** \* : Height does not include 5" for casters  
Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

# DRAWERED UNDERCOUNTER REFRIGERATOR

Back Mounted Condensing Unit



**EVEREST**  
REFRIGERATION  
www.EVERESTref.com


**ETB – Series Model : ETBWR2-D4**

| DIMENSIONAL DATA                   |                                  |                                      |
|------------------------------------|----------------------------------|--------------------------------------|
| Net capacity cu. ft.               | 15 (424.8 cu l)                  |                                      |
| <b>Exterior (mm)</b>               | Length Overall in.               | 59 1/4" (1506)                       |
|                                    | Depth Overall in.                | 31 1/2" (800)                        |
|                                    | Height Overall in.*              | 29 1/8" (740)                        |
| <b>Interior (mm)</b>               | Length Overall in.               | 55 1/8" (1400)                       |
|                                    | Depth Overall in. <sup>Da</sup>  | 26 3/4" (680)                        |
|                                    | Depth Overall in. <sup>Db</sup>  | 17 1/8" (435)                        |
|                                    | Height Overall in. <sup>Ha</sup> | 23 1/2" (560)                        |
|                                    | Height Overall in. <sup>Hb</sup> | 15 3/4" (400)                        |
|                                    | Height Overall in. <sup>Hc</sup> | 8 1/8" (205)                         |
| Crated Weight                      | 347lbs (157.4kg)                 |                                      |
| # of Drawers                       | 4                                |                                      |
| # of Shelves                       | N/A                              |                                      |
| # of Drawer Pans <sup>a</sup>      | Top 4" Deep                      | 1/2 x 2, 1/3 x 4<br>1/4 x 2, 1/6 x 4 |
|                                    | Bottom 6" Deep                   | 1/2 x 2, 1/3 x 4                     |
| Shelf Size Length x Depth in. (mm) | N/A                              |                                      |
| ELECTRICAL DATA                    |                                  |                                      |
| Voltage (V-Hz-Ph)                  | 115-60-1                         |                                      |
| Full load amperes                  | 4.80                             |                                      |
| Feed wires with Ground             | 3                                |                                      |
| Cord Length ft.                    | 9                                |                                      |
| REFRIGERATION DATA                 |                                  |                                      |
| Refrigerant                        | R-134A                           |                                      |
| Compressor H.P.                    | 1/4+ HP                          |                                      |
| BTU/HR <sup>†</sup> (Kcal/h)       | 2075 (523)                       |                                      |


Specifications subject to change without notice.

- \*: Height does not include 5" for casters.
- Da: Interior Depth (top level).
- Db: Interior Depth (bottom level).
- Ha: Interior Height (floor to ceiling).
- Hb: Interior Height (floor to evaporator cover).
- Hc: Interior Height (bottom ledge to evaporator cover).
- a : Drawer pans are not included.
- †: Based on evaporating temperature of 23°F(-5°C) & Condensing temperature of 131°F(55°C).

## Dimensions (mm)

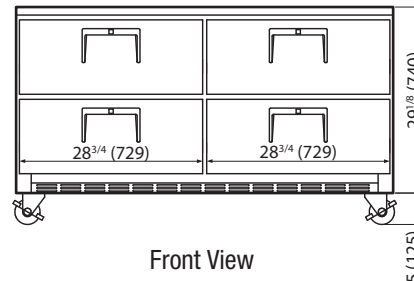

Front View

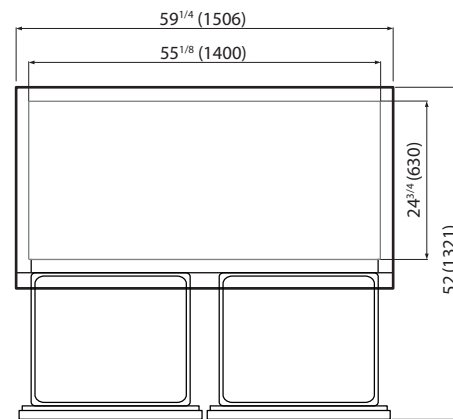

Top View

## Drawer Pan Configurations<sup>a</sup>


[(2) Pan dividers per drawer included]



Top Drawer Pan Deep 4"



Bottom Drawer Pan Deep 6"

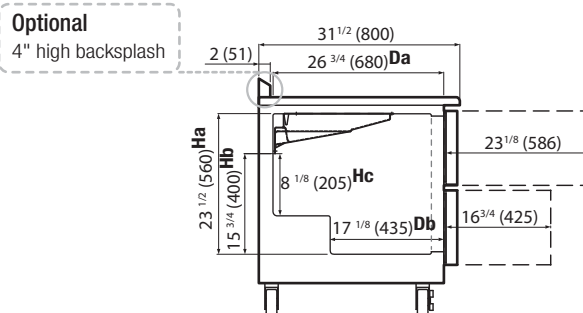

Side View

Equipped With One NEMA 5-15P Plug



- Project / Customer \_\_\_\_\_
- Item No. \_\_\_\_\_
- Quantity \_\_\_\_\_



**Warranty**  
5 Year — Compressor Warranty  
3 Year — Parts & Labor Warranty

## Contact

201 W. Artesia Blvd, Compton, CA 90220  
T. (310) 323-6586, (800) 444-6285  
F. (310) 323-7524, (310) 761-1127