


Nominal Depth (in.)	Nominal Size AxBxD (in.)	Standard Capacity						High Capacity					
		300 FPM		500 FPM		Media Area (Sq. Ft.)	Weight Each (lbs)	300 FPM		500 FPM		Media Area (Sq. Ft.)	Weight Each (lbs)
		CFM	PD	CFM	PD			CFM	PD	CFM	PD		
Standard Capacity 13 ppf	10x10x1	208	0.17	347	-	1.1	0.2	208	0.15	347	-	1.3	0.2
	10x20x1	417	0.17	694	-	2.3	0.3	417	0.15	694	-	2.7	0.3
	12x20x1	500	0.17	833	-	2.7	0.3	500	0.15	833	-	3.1	0.3
	12x24x1	600	0.17	1000	-	3.2	0.3	600	0.15	1000	-	3.7	0.4
	14x24x1	583	0.17	972	-	3.3	0.3	583	0.15	972	-	3.7	0.4
	14x25x1	729	0.17	1215	-	4.1	0.4	729	0.15	1215	-	4.6	0.5
	15x20x1	625	0.17	1042	-	3.5	0.4	625	0.15	1042	-	3.9	0.4
	16x20x1	667	0.17	1111	-	3.7	0.4	667	0.15	1111	-	4.1	0.4
	16x25x1	833	0.17	1389	-	4.6	0.5	833	0.15	1389	-	5.2	0.5
	18x24x1	900	0.17	1500	-	4.9	0.5	900	0.15	1500	-	5.7	0.6
High Capacity 15 ppf	18x25x1	938	0.17	1563	-	5.2	0.5	938	0.15	1563	-	5.9	0.6
	20x20x1	833	0.17	1389	-	4.5	0.5	833	0.15	1389	-	5.1	0.5
	20x24x1	1000	0.17	1667	-	5.4	0.5	1000	0.15	1667	-	6.2	0.6
	20x25x1	1042	0.17	1736	-	5.7	0.6	1042	0.15	1736	-	6.4	0.6
	24x24x1	1200	0.17	2000	-	6.4	0.6	1200	0.15	2000	-	7.4	0.7
	25x25x1	1302	0.17	2170	-	7.2	0.7	1302	0.15	2170	-	8.3	0.8

Nominal Size (in.)	Actual Size		
	A	B	D
10x10x1	9 1/2"	9 1/2"	3/4"
10x20x1	9 1/2"	19 1/2"	3/4"
12x20x1	11 1/2"	19 1/2"	3/4"
12x24x1	11 3/8"	23 3/8"	3/4"
14x20x1	13 1/2"	19 1/2"	3/4"
14x25x1	13 1/2"	24 1/2"	3/4"
15x20x1	14 1/2"	19 1/2"	3/4"
16x20x1	15 1/2"	19 1/2"	3/4"
16x25x1	15 1/2"	24 1/2"	3/4"
18x24x1	17 3/8"	23 3/8"	3/4"
18x25x1	17 1/2"	24 1/2"	3/4"
20x20x1	19 1/2"	19 1/2"	3/4"
20x24x1	19 3/8"	23 3/8"	3/4"
20x25x1	19 1/2"	24 1/2"	3/4"
24x24x1	23 3/8"	23 3/8"	3/4"
25x25x1	24 1/2"	24 1/2"	3/4"

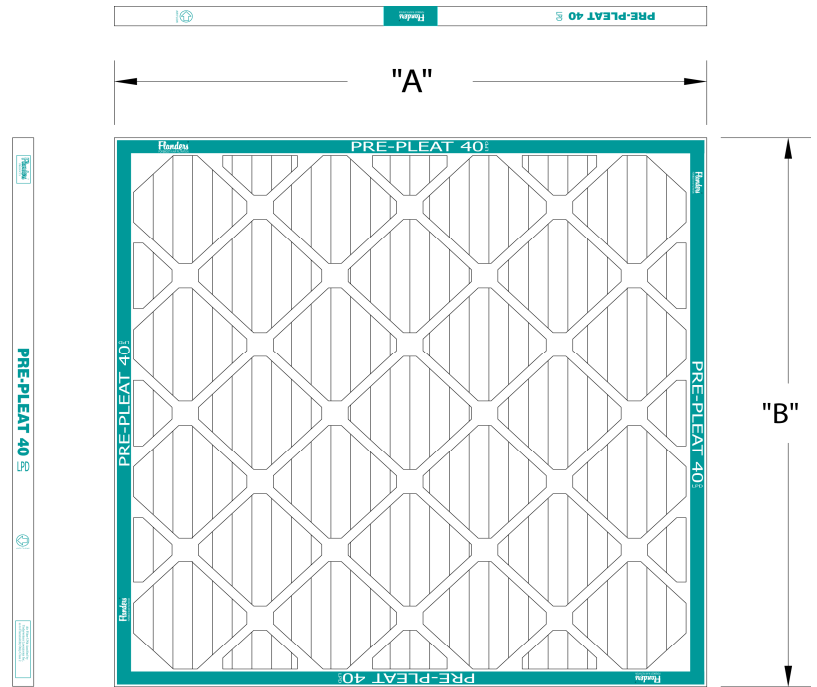

Notes:

1. PD represents pressure drop in inches w.g. The recommended final pressure drop for all models is 1.0 in. w.g. System design may dictate a lower change-out point.
2. Efficiency is not affected by the conditioning steps outlined in ASHRAE 52.2-2007 per Appendix J.

Standard Capacity	80055.01xxxx
High Capacity	80255.01xxxx

Model No.	Qty:
Model No.	Qty:
Model No.	Qty:


Specifications:

1. Media is made of 100% synthetic non-woven proprietary media that can be recycled.
2. The media is supported by an expanded metal continuously laminated on the air leaving side to provide pleat stability while eliminating flutter.
3. Pleat design is a V-Pleat that aids in pressure drop while reducing energy cost and allowing total media usage and provides maximum airflow and dust holding capacity.
4. Frame is a two-piece construction, made of a heavy duty 24 point moisture resistant material. Diagonal and horizontal support members are bonded to the media on both sides.
5. Highest dust holding capacity and lowest pressure drop in the industry
6. Maintains a mechanical MERV 8 per ASHRAE Standard 52.2. Classified UL 900 Class 2.
7. Maximum Operating Temperature is 180°F.

Customer		
Customer order No.		
Flanders order No.		
Title:	1 Inch Deep Pre Pleat 40 LPD UL 900	
Drawing No.	Date	Rev.
1" Pre-Pleat 40 LPD	9/8/2011	B

Nominal Depth (in.)	Nominal Size AxBxD (in.)	Standard Capacity						High Capacity						
		300 FPM		500 FPM		Media Area (Sq. Ft.)	Weight Each (lbs)	300 FPM		500 FPM		Media Area (Sq. Ft.)	Weight Each (lbs)	
		CFM	PD	CFM	PD			CFM	PD	CFM	PD			
2"	10x20x2	417	0.11	694	0.21	4.3	0.4	417	0.10	694	0.20	6.2	0.5	
	12x20x2	500	0.11	833	0.21	4.8	0.5	500	0.10	833	0.20	7.2	0.5	
	12x24x2	600	0.11	1000	0.21	5.8	0.6	600	0.10	1000	0.20	8.7	0.6	
	14x20x2	583	0.11	972	0.21	5.8	0.5	583	0.10	972	0.20	8.6	0.6	
	14x25x2	729	0.11	1215	0.21	7.2	0.7	729	0.10	1215	0.20	10.8	0.8	
	Standard Capacity 10 ppf	15x20x2	625	0.11	1042	0.21	6.2	0.6	625	0.10	1042	0.20	9.1	0.7
		16x20x2	667	0.11	1111	0.21	6.7	0.6	667	0.10	1111	0.20	9.6	0.7
		16x25x2	833	0.11	1389	0.21	8.4	0.7	833	0.10	1389	0.20	12.0	0.9
		18x24x2	900	0.11	1500	0.21	8.7	0.8	900	0.10	1500	0.20	13.3	0.9
	High Capacity 15 ppf	18x25x2	938	0.11	1563	0.21	9.0	0.8	938	0.10	1563	0.20	13.8	1.0
20x20x2		833	0.11	1389	0.21	8.2	0.7	833	0.10	1389	0.20	12.0	0.9	
20x24x2		1000	0.11	1667	0.21	9.8	0.9	1000	0.10	1667	0.20	14.4	1.0	
20x25x2		1042	0.11	1736	0.21	10.2	0.9	1042	0.10	1736	0.20	15.0	1.1	
24x24x2		1200	0.11	2000	0.21	11.5	1.0	1200	0.10	2000	0.20	17.3	1.2	
	25x25x2	1302	0.11	2170	0.21	12.6	1.1	1302	0.10	2170	0.20	19.3	1.3	

Nominal Size (in.)	Actual Size		
	A	B	D
10x20x2	9 1/2"	19 1/2"	1 3/4"
12x20x2	11 1/2"	19 1/2"	1 3/4"
12x24x2	11 3/8"	23 3/8"	1 3/4"
14x20x2	13 1/2"	19 1/2"	1 3/4"
14x25x2	13 1/2"	24 1/2"	1 3/4"
15x20x2	14 1/2"	19 1/2"	1 3/4"
16x20x2	15 1/2"	19 1/2"	1 3/4"
16x25x2	15 1/2"	24 1/2"	1 3/4"
18x24x2	17 3/8"	23 3/8"	1 3/4"
18x25x2	17 1/2"	24 1/2"	1 3/4"
20x20x2	19 1/2"	19 1/2"	1 3/4"
20x24x2	19 3/8"	23 3/8"	1 3/4"
20x25x2	19 1/2"	24 1/2"	1 3/4"
24x24x2	23 3/8"	23 3/8"	1 3/4"
25x25x2	24 1/2"	24 1/2"	1 3/4"

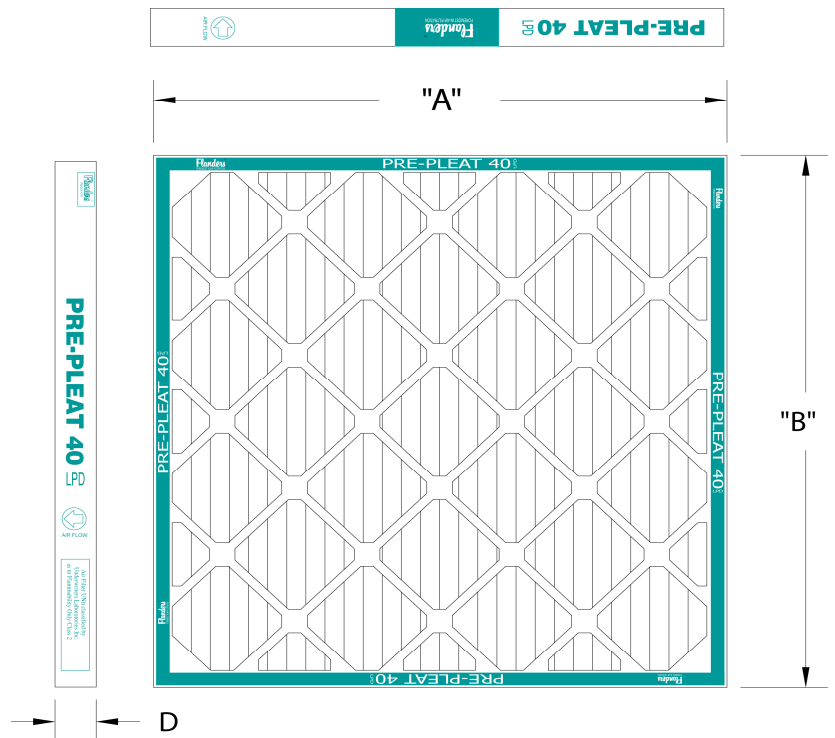

Standard Capacity	80055.02xxxx
High Capacity	80255.02xxxx

Model No.	Qty:
Model No.	Qty:
Model No.	Qty:

Notes:

1. PD represents pressure drop in inches w.g. The recommended final pressure drop for all models is 1.0 in. w.g. System design may dictate a lower change-out point.
2. Efficiency is not affected by the conditioning steps outlined in ASHRAE 52.2-2007 per Appendix J.


Specifications:

1. Media is made of 100% synthetic non-woven proprietary media that can be recycled.
2. The media is supported by an expanded metal continuously laminated on the air leaving side to provide pleat stability while eliminating flutter.
3. Pleat design is a V-Pleat that aids in pressure drop while reducing energy cost and allowing total media usage and provides maximum airflow and dust holding capacity.
4. Frame is a two-piece construction, made of a heavy duty 24 point moisture resistant material. Diagonal and horizontal support members are bonded to the media on both sides.
5. Highest dust holding capacity and lowest pressure drop in the industry
6. Maintains a mechanical MERV 8 per ASHRAE Standard 52.2. Classified UL 900 Class 2.
7. Maximum Operating Temperature is 180°F.

Customer		
Customer order No.		
Flanders order No.		
Title:	2 Inch Deep Pre Pleat 40 LPD UL 900	
Drawing No.	Date	Rev.
2" Pre-Pleat 40 LPD	12/23/2011	B

Nominal Depth (in.)	Nominal Size AxBxD (in.)	Standard Capacity						High Capacity					
		300 FPM		500 FPM		Media Area (Sq. Ft.)	Weight (lbs)	300 FPM		500 FPM		Media Area (Sq. Ft.)	Weight (lbs)
		CFM	PD	CFM	PD			CFM	PD	CFM	PD		
4" Standard Capacity 9 ppf High Capacity 13 ppf	12x24x4	600	0.10	1000	0.19	11.1	1.0	600	0.09	1000	0.17	16.5	1.0
	16x20x2	667	0.10	1111	0.19	12.3	1.0	667	0.09	1111	0.17	18.0	1.2
	16x25x4	833	0.10	1389	0.19	15.5	1.3	833	0.09	1389	0.17	22.6	1.4
	18x24x4	900	0.10	1500	0.19	17.3	1.4	900	0.09	1500	0.17	24.2	1.5
	20x20x4	833	0.10	1389	0.19	15.4	1.3	833	0.09	1389	0.17	22.3	1.4
	20x24x4	1000	0.10	1667	0.19	18.6	1.5	1000	0.09	1667	0.17	24.0	1.7
	20x25x4	1042	0.10	1736	0.19	19.3	1.6	1042	0.09	1736	0.17	27.7	1.8
	24x24x4	1200	0.10	2000	0.19	22.3	1.8	1200	0.09	2000	0.17	28.8	2.0
	25x29x4	1510	0.10	2517	0.19	28.4	2.4	1510	0.09	2517	0.17	28.4	2.7
28x30x4	1750	0.10	2917	0.19	33.2	2.8	1750	0.09	2917	0.17	42.6	3.1	

Nominal Size (in.)	Actual Size		
	A	B	D
12x24x4	11 3/8"	23 3/8"	3 3/4"
16x25x4	15 1/2"	24 1/2"	3 3/4"
18x24x4	17 3/8"	23 3/8"	3 3/4"
20x20x4	19 1/2"	19 1/2"	3 3/4"
20x24x4	19 3/8"	23 3/8"	3 3/4"
20x25x4	19 1/2"	24 1/2"	3 3/4"
24x24x4	23 3/8"	23 3/8"	3 3/4"
25x25x4	24 1/2"	24 1/2"	3 3/4"
25x29x4	24 1/2"	28 1/2"	3 3/4"
28x30x4	27 1/2"	29 1/2"	3 3/4"

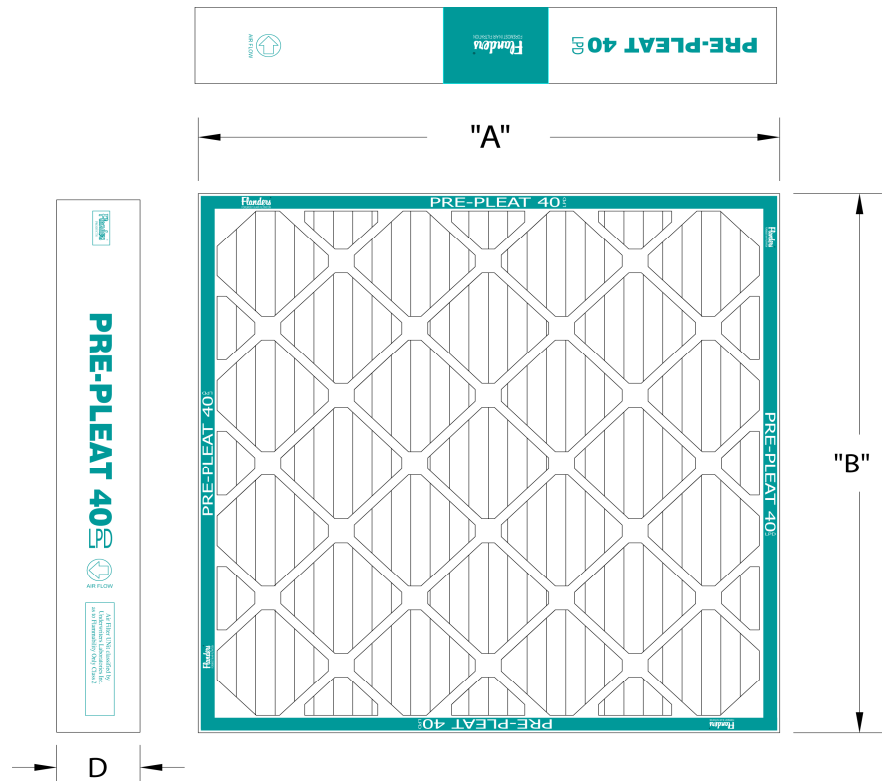

Notes:

1. PD represents pressure drop in inches w.g. The recommended final pressure drop for all models is 1.0 in. w.g. System design may dictate a lower change-out point.
2. Efficiency is not affected by the conditioning steps outlined in ASHRAE 52.2-2007 per Appendix J.

Standard Capacity	80055.04xxxx
High Capacity	80255.04xxxx

Model No.	Qty:
Model No.	Qty:
Model No.	Qty:

Specifications:

1. Media is made of 100% synthetic non-woven proprietary media that can be recycled.
2. The media is supported by an expanded metal continuously laminated on the air leaving side to provide pleat stability while eliminating flutter.
3. Pleat design is a V-Pleat that aids in pressure drop while reducing energy cost and allowing total media usage and provides maximum airflow and dust holding capacity.
4. Frame is a two-piece construction, made of a heavy duty 24 point moisture resistant material. Diagonal and horizontal support members are bonded to the media on both sides.
5. Highest dust holding capacity and lowest pressure drop in the industry
6. Maintains a mechanical MERV 8 per ASHRAE Standard 52.2. Classified UL 900 Class 2.
7. Maximum Operating Temperature is 180°F.

Customer		
Customer order No.		
Flanders order No.		
Title:	4 Inch Deep Pre Pleat 40 LPD UL 900	
Drawing No.	Date	Rev.
4" Pre-Pleat 40 LPD	12/23/2011	B