

Submittal Data: System 36CLX1 ASU36CLX1 & AOU36CLX1



Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	
Unit Designation:	Schedule No. Model No.:

Capacities:

Cooling	33,000 BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
SEER	15.5
EER	8.5

Indoor Unit:

Power Supply	208/230V ± 10%
Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i>	51/42/37/33
Weight	31 lbs.


Outdoor Unit:

Power Supply	208/230V ± 10%
Recommended Fuse Size	30A
Min. Ampacity	22A
MCA	22A
Running Current <i>Cooling</i>	17.3A
Weight	150 lbs.

Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	164 ft.
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

OUTLINE AND DIMENSIONS

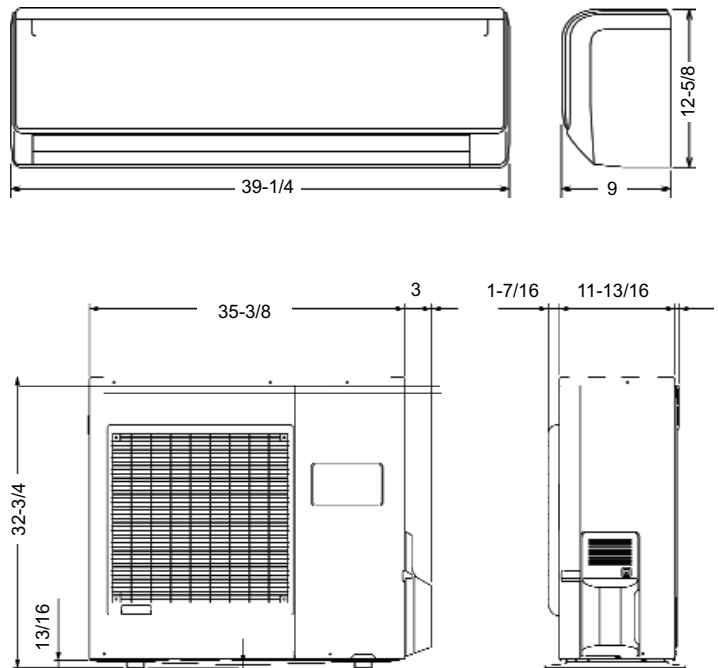

Standard Features:

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> ◆ Seven year compressor warranty ◆ Five year parts warranty ◆ Digital wireless remote control ◆ Auto Louver: 4 Way ◆ Auto Mode ◆ Ion Deodorizing Filter | <ul style="list-style-type: none"> ◆ Sleep timer ◆ Built in Low Ambient ◆ Auto Restart/ Reset ◆ 24 hour timer ◆ Power Diffuser ◆ Apple Catechin Filter | <ul style="list-style-type: none"> ◆ Optional Wired Remote Control ◆ Dry mode ◆ Refrigerant R410A ◆ Quiet Mode ◆ Cold Prevention ◆ Coil Dry Mode |
|--|--|--|

Notes:
