

Description

Gastite® is a corrugated stainless steel tubing complying with ANSI LC 1 "Fuel Gas Piping Systems Using CSST" and listed with CSA®, ICBO and IAPMO. Manufacturing materials are: ASTM A240 type 300 corrugated stainless steel tubing with a minimum wall thickness of .010", jacketing of UV resistant polyethylene meeting the requirements of ASTM E84 for flame spread and smoke density. All mechanical tube fittings are SAE CA360 brass incorporating double wall flare sealing and Jacket-Lock™ jacket capturing for steel tubing protection.

Features:

- Termination Fitting (male adapter, bushing, termination nut) Bracket and Jam Nut
- Approved for Concealed Use
- Tool-Less Flare Fitting Design
- Metal-to-Metal Seal
- Self-Guiding Fitting Assembly
- Patented Jacket-Lock™
- Fully Reusable Fitting
- Patent Pending Multi-Point Seal




Listings:

- CSA: Certificate No. 2728525
- ICC-EC Report No. PMG 1019
- IAPMO: File No. C-325

Technical Data:

Max. Approved Operating Pressure	25 psi
Operating Temperature Range	-40°F to 160°F
Fitting Material	CA360

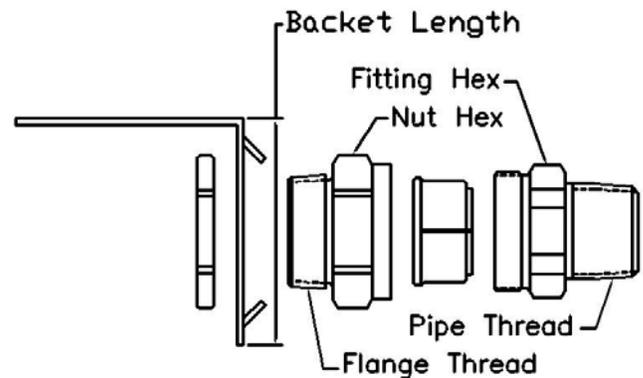

Dimensional Characteristics

Size	P/N	Pipe Tread	Flange Thread	Nut Hex	Fitting Hex	Bracket Height	Bracket Width	Bracket Length	Assembly Torque (ft-lbs)
1/2"	XR2TRMBKT-8	1/2"	3/4"	1-1/4"	1-1/8"	2-1/2"	2"	2-1/2"	35
3/4"	XR2TRMBKT-11	3/4"	1"	1-1/2"	1-5/16"	2-1/2"	2"	2-1/2"	45
1"	XR2TRMBKT-16	1"	1-1/4"	1-7/8"	1-11/16"	3"	3"	3-3/4"	65
1-1/4"	FSTRM-20*	1-1/4"	1-1/2"	2-3/16"	2-1/16"	3"	3"	3-3/4"	95
1-1/2"	XR2TRMBKT-24	1-1/2"	2"	2-1/2"	2-5/16"	4"	4"	5"	120
2"	XR2TRMBKT-32	2"	2-1/2"	3-1/8"	2-15/16"	4"	4"	5"	150

* FlashShield Fittings can be used with Gastite and FlashShield CSST