



# SUBMITTAL COVER SHEET

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_

ARCHITECT \_\_\_\_\_

ENGINEER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

## UNIT SUMMARY


Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						

**ACCESSORIES:**

**NOTES:**

# SUBMITTAL SHEET FOR PACKAGE GAS/ELECTRIC UNITS: RKNL-B WITH CAPACITIES FROM 6-12.5 TONS [21.1-44.0 kW]

JOB NAME \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 ENGINEER \_\_\_\_\_  
 LOCATION \_\_\_\_\_  
 ORDER NO. \_\_\_\_\_  
 SUBMITTED FOR  APPROVAL  RECORD  
 SUBMITTED BY \_\_\_\_\_  
 DATE \_\_\_\_\_  
 UNIT DESIGNATION \_\_\_\_\_  
 MODEL NO. \_\_\_\_\_

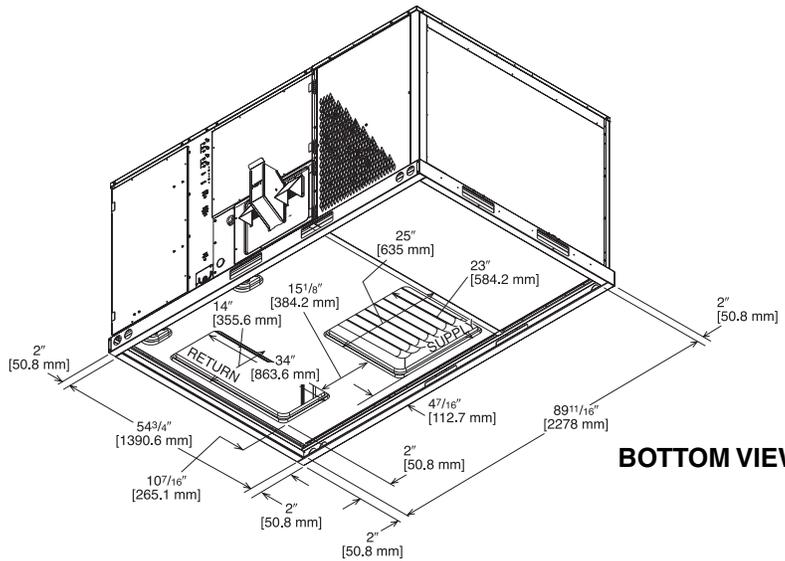

## UNIT DATA

### COOLING PERFORMANCE

TOTAL CAPACITY*	_____	MBH
SENSIBLE CAPACITY*	_____	MBH
EFFICIENCY (at ARI)	_____	EER
PART LOAD EFFICIENCY	_____	IPLV
AMBIENT DB TEMP	_____	°F
ENTERING DB TEMP	_____	°F
ENTERING WB TEMP	_____	°F
LEAVING DB TEMP	_____	°F
LEAVING WB TEMP	_____	°F
TOTAL POWER INPUT	_____	kW
ELEVATION	_____	FT
SOUND POWER	_____	DBELS

### HEATING PERFORMANCE

GAS HEAT INPUT	_____	BTU
GAS HEAT OUTPUT	_____	BTU
STEADY STATE EFFICIENCY	_____	MBH

### SUPPLY AIR BLOWER PERFORMANCE

SUPPLY AIR	_____	CFM [L/s]
OUTSIDE AIR	_____	CFM [L/s]
EXTERNAL STATIC PRESSURE	_____	IWG
DUCT CONNECTION LOCATION	_____	
BLOWER SPEED	_____	RPM
MOTOR RATING	_____	HP [W]
BRAKE HORSEPOWER	_____	BHP
POWER INPUT REQUIREMENT	_____	kW

### ELECTRICAL DATA


POWER SUPPLY	_____	Hz
MINIMUM CIRCUIT AMPACITY	_____	AMPS
MAXIMUM OVERCURRENT DEVICE	_____	
FUSE SIZE	_____	AMPS
HACR CIRCUIT BREAKER	_____	AMPS

### DIMENSIONS & WEIGHT


HEIGHT	___ IN	WIDTH	___ IN	DEPTH	___ IN
TOTAL WEIGHT	_____ LBS [kg]				
(including factory options)					

### CLEARANCES

FRONT	48" [1219 mm]	BACK	18" [457 mm]
BOTTOM	0"	TOP	60" [1524 mm]
LEFT SIDE	18" [457 mm]		36" [914 mm]
RIGHT SIDE (condenser end)			18" [457 mm]

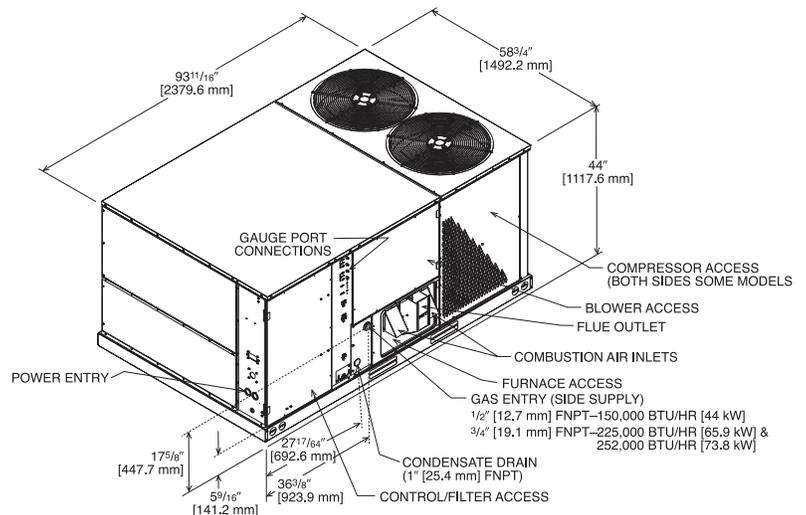

## ROOFCURB INSTALLATION

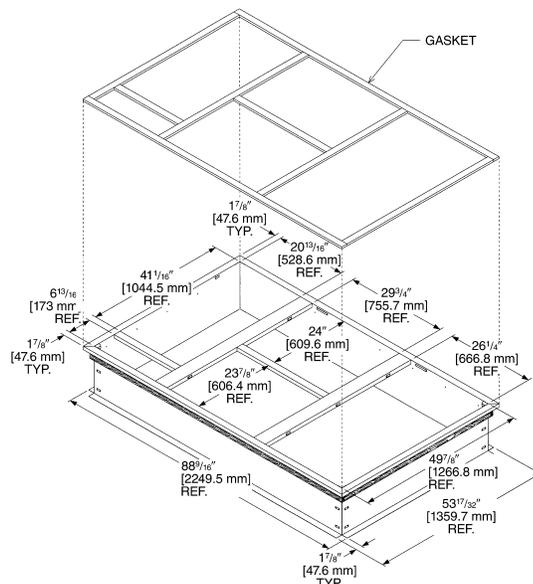

Roofcurb Includes Insulation Panels

[ ] Designates Metric Conversions

## FEATURES FOR PACKAGE GAS/ELECTRIC UNITS 6 THRU 12.5 NOMINAL TONS [21.1 THRU 44.0 kW]

### Gas Heat

- Two-Stage Gas Valve (50/100%) for Superior Comfort Control at Minimum Operating Cost
- Dual Inducers allow for 81% A.F.U.E. Steady state efficiency at High *and* Low Stage
- Rheem Exclusive In-shot Burners
- Solid State, Direct Spark Ignition with Remote Flame Sense and on-board diagnostics

### Cooling

- R410 Refrigerant
- Quiet, Efficient, Scroll® Compressors
- Two-Stage Cooling for Superior Comfort Control at Minimum Operating Cost
- Belt-drive Blower with optional drive to accommodate design conditions as high as 2.0 inches [.37 kPa] of external static pressure at nominal airflow
- Copper Tube/Aluminum Fin Coils

### Service Features

- 1/4 turn Fasteners and Hinged Access Panels for Convenience
- Large Control Panel with numbered and color coded wiring for Easy Troubleshooting
- Front Access, Slide-Out Blower Assembly for Easy Maintenance
- Convertible Airflow for Maximum Flexibility
- Solid-State Furnace Controls with Diagnostic L.E.D. for Easy Troubleshooting
- Slide out Condensate Drainpan
- Factory-Installed two-inch [50.8 mm], throw away filters. Accessible without tools

- Externally-mounted refrigerant gauge ports
- Side or Base utility access minimizing roof penetrations
- Full perimeter, forkable, riggable baserails with protective forkboards for easy handling
- Plug-in Electrical Connections on outdoor fan assemblies
- Unit is prewired to accept Slip-in Economizer
- Complete Factory Tested, Charged Wired

### Reliability Features

- One-piece Top and Base pan on indoor section. One-inch [25.4 mm] raised flanges on supply/return opening for superior water management
- Aluminized Steel Heat Exchanger helps eliminate corrosion
- Base pan Insulation mounted on bottom helps eliminate corrosion and improves indoor air quality
- Non-Corrosive, sloped drain pan helps improve indoor air quality
- Insulation secured by adhesive *and* mechanical means
- Electrodeposition powder-coat paint process guards against extreme weather conditions and withstands 1000-hour salt-spray test
- Solid core liquid line filters
- High and Low pressure switches

[ ] Designates Metric Conversions

## ACCESSORIES

### Factory Installed

- Stainless Steel Gas Heat .....
- Single Enthalpy w/Barometric Relief .....
- Single Enthalpy w/Barometric Relief and  
Smoke Detector .....
- Disconnect Switch .....
- Convenience Outlet (Powered) .....
- Oversized Blower Motor .....
- Low Ambient .....
- Outdoor Coil Guard .....

### Field Installed

- 14" Full Perimeter Roof .....
- 24" Full Perimeter Roof .....
- Roof Curb Adapter .....
- Dual Enthalpy Sensor .....
- Power Exhaust .....
- CO<sub>2</sub> Sensor .....
- Natural Gas High Altitude Kit.....
- Propane Conversion Kit .....
- Concentric Diffuser .....
- Low Ambient Kit.....
- Hail Guard .....
- Manual Outside Air Intake Damper .....
- Motorized Outside Air Intake Damper.....
- Single Enthalpy w/Barometric Relief .....
- Single Enthalpy w/Barometric Relief and  
Smoke Detector .....

**Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.**

Rheem Sales Company, Inc.  
P.O. Box 17010, Fort Smith, AR 72917

*"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."*