



#16 GRN/YEL GROUND LEAD TO BE 12.000+1-0 BETWEEN CENTERS OF TERMS. TERMINALS TO FIT #10 SCREW.

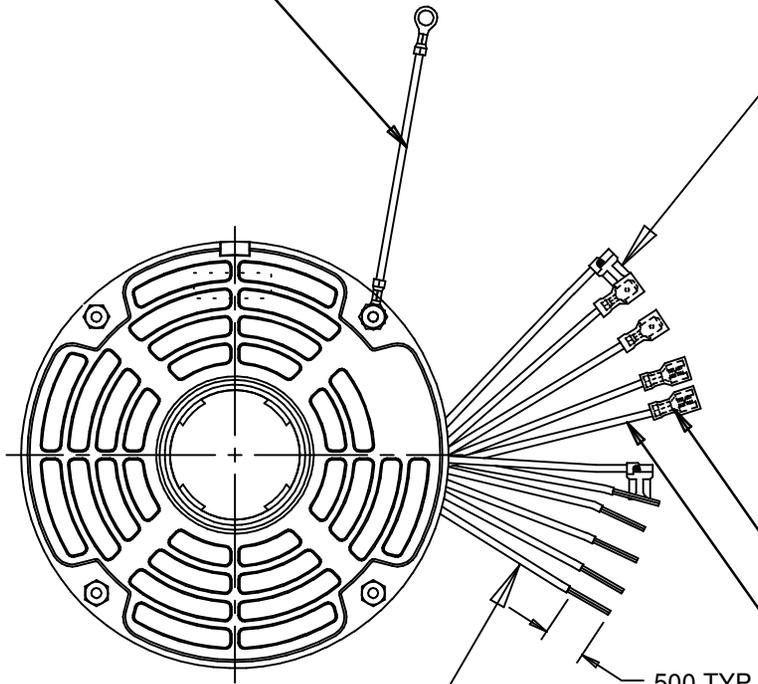

(2) .250 FLAG TYPE Q.C. WITH INSUL. GRIP ON BROWN LEADS

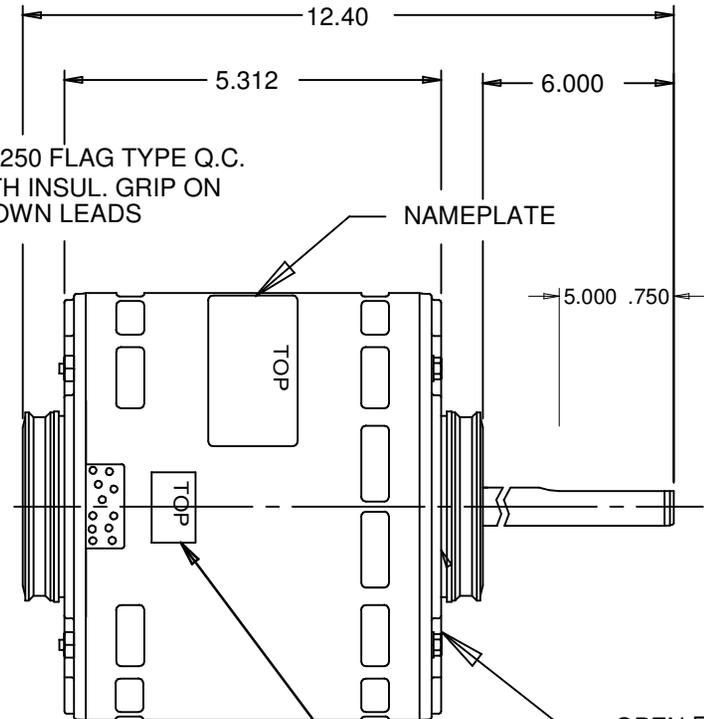

WARNING LABEL TO BE ADJACENT TO REVERSING LEADS.

(7) LEADS, #18, .062 THICK INSUL. TO EXTEND BEYOND MOTOR.
 (2) BRN=21.000+2-0; WHT=27.000+2-0;
 BLK=27.000+2-0 BLU=27.000+2-0
 YEL=27.000+2-0; RED=27.000+2-0.

(2) FEMALE Q.C. TERMS. ON ORG AND YEL LEADS
 (2) MALE Q.C. TERMS ON ORG AND YEL LEADS.

(4) LEADS, #18, .031 THICK INSUL. TO EXTEND BEYOND MOTOR.
 (2) YEL=8.000+2-0; (2) ORG=8.000+2-0.

NIDEC MOTOR CORPORATION 15-Oct-12

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN
K55HXSWW-7987	--	STANDARD	3/4	115	12.1	60	1075/4SPD	CCW LEAD END REV.	3340

SHEET NUMBER	REV	REVISION RECORD FOR: C6404-00
1 OF 1	D	UPDATED ENGINEER APPROVED TO B. GAITAN
REVISION DATE		
15-OCT-12		

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

NIDEC MOTOR CORPORATION

ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN

ISSUED BY	REVIEWED BY	ENGINEER APPROVED	TITLE	CODE	ITEM NO.	SIZE
R. MORALES	M. LARGENT	B. GAITAN	ASSEMBLED VIEW	V01	333672	A